



A

HEWLETT-PACKARD COMPANY

Legal Department, 20BN
P.O. Box 10301
Palo Alto, California 94303-0890

PATENT APPLICATION

ATTORNEY DOCKET NO. 10980749

IN THE U.S. PATENT AND TRADEMARK OFFICE
Patent Application Transmittal Letter

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): (X) Utility () Design

(x) original patent application,

() continuation-in-part application

INVENTOR(S): Eidson

TITLE: MOTION CONTROL USING TIME SYNCHRONIZATION

Enclosed are:

(X) The Declaration and Power of Attorney. (X) signed () unsigned or partially signed

(X) 3 sheets of drawings (one set) Informal

() Information Disclosure Statement and Form PTO-1449 () Associate Power of Attorney

() Priority document(s) () (Other) (fee \$)

CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY				
(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) TOTALS
TOTAL CLAIMS	17 — 20	0	X	\$ 0
INDEPENDENT CLAIMS	3 — 3	0	X	\$ 0
ANY MULTIPLE DEPENDENT CLAIMS	0			\$ 0
BASIC FEE: Design (); Utility (760.00)				\$ 760.00
TOTAL FILING FEE				\$ 760.00
OTHER FEES				\$
TOTAL CHARGES TO DEPOSIT ACCOUNT				\$ 760.00

Charge \$ 760.00 to Deposit Account 08-2025. At any time during the pendency of this application, please charge any fees required or credit any over payment to Deposit Account 08-2025 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 08-2025 under 37 CFR 1.16, 1.17, 1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

"Express Mail" label no. EE664530033US

Date of Deposit 12-3-98

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231

By Paul H. Horstmann
Typed Name: Paul H. Horstmann

Respectfully submitted,

By Paul H. Horstmann
Paul H. Horstmann

Attorney/Agent for Applicant(s)
Reg. No. 36,167

Date:

Telephone No.: 415-602-1721

JC540 U.S. PTO
09/205115
12/03/98

UNITED STATES PATENT APPLICATION FOR


MOTION CONTROL
USING TIME SYNCHRONIZATION

Inventor:
John C. Eidson

CERTIFICATE OF MAILING BY "EXPRESS MAIL"
UNDER 37 C.F.R. § 1.10 .

"Express Mail" mailing label number: EE664530033US
Date of Mailing: 12-3-98

I hereby certify that this correspondence is being deposited with the United States Postal Service, utilizing the "Express Mail Post Office to Addressee" service addressed to **Assistant Commissioner for Patents, Washington, D.C. 20231** and mailed on the above Date of Mailing with the above "Express Mail" mailing label number.



Paul H. Horstmann, Reg. No. 36,167
Signature Date: 12-3-98

BACKGROUND OF THE INVENTION

Field of Invention

5 The present invention pertains to the field of systems. More particularly, this invention relates to motion control using time synchronization technology.

Art Background

10 Motion control systems are commonly employed in a wide variety of devices and systems including devices and systems used in industrial, office, and home environments. A motion control system may be
15 defined as a control system that provides precise control of the movement of various actuating elements of a device or system. A controllable movement of an actuating element may be referred to as an axis or a degree of freedom. A typical motion control system
20 includes an actuator for each axis and control circuitry that generates control values and provides the control values to the actuators as needed for a desired motion.

25 For example, a pen-based plotter usually includes an actuating element that moves a pen along an x axis and an actuating element that moves the pen along a y axis and these actuating elements provide two degrees of freedom for pen movement. Other
30 degrees of freedom for pen movement in a plotter may be provided by actuating elements that change ink colors and actuating elements that move the pen into and out of contact with paper.

Prior motion control systems typically include a central controller which generates control values and provides the control values to the actuators in a sequence that will accomplish a desired motion. It is usually desirable that the control values be applied to the actuators with precise timing in order to precisely coordinate the motion among the axes. Any delay or skew in the application of control values to different actuators may cause deviation from the desired motion.

For example, a central controller in a plotter typically generates a series of x control values and a corresponding series of y control values when drawing a circle. It is usually desirable that each x control value be applied to the x actuator at the same time as the corresponding y control value is applied to the y actuator in order to prevent one axis or the other from deviating from the desired circle motion.

Prior motion control systems usually accomplish such precise coordination in the application of control values by employing control cards that enable the simultaneous application control values to multiple actuators. For example, a control card may have two output registers for applying control values to two different actuators. A central controller in such a system usually loads the output registers and then simultaneously triggers the outputs of both of the output registers to the actuators at the desired time. The tight coupling of the output registers on a card usually ensures that the corresponding control values are applied at substantially the same time.

Typically, such control cards are manufactured in standard numbers of axis, such as 2 or 4 axis, in order to be cost effective. If coordination is needed among more axes than a standard number then
5 several cards may be necessary and some scheme must usually be devised for coordination among the cards. In addition, if portions of a motion control system are widely separated then coordination of the remote portions usually requires special attention to wiring
10 or the use of specialized networks for communication among such prior control cards. Unfortunately, this usually increases the cost and complexity of a motion control system. On the other hand, fewer axes may be needed for a motion control system than are provided
15 on such a prior control card. In that case the extra hardware purchased but not used usually adds unneeded costs to a motion control system. In addition, such prior control cards may make it difficult to upgrade a system if existing control cards cannot accommodate
20 additional degrees of freedom.

SUMMARY OF THE INVENTION

5 A motion control system is disclosed having a
set of control nodes each of which controls motion
along a single axis of the motion control system and
which coordinate their collective motions using time
synchronization technology. Each control node
corresponds to an axis of the motion control system
and each control node includes a synchronized clock
10 and participates in a protocol for synchronizing the
synchronized clocks. The application of a series of
control values to each axis in the motion control
system is coordinated using the synchronized clocks.

15 A motion control system based on time
synchronization enables the use of simpler and
cheaper computing resources in each control node in
comparison to prior systems in which one control card
must handle multiple axes simultaneously. Each
20 control node may be sized and optimized for the
characteristics of a particular axis as well as the
motion function to be implemented. Only the exact
number of control nodes used in motion function are
used and extra capacity is not wasted. A motion
25 control system based on time synchronization enables
the use of a conventional network communication link
for clock synchronization rather than a specialized
higher cost link that might otherwise be needed to
coordinate motion control as may be the case prior
30 systems.

Other features and advantages of the present
invention will be apparent from the detailed
description that follows.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is described with respect
to particular exemplary embodiments thereof and
5 reference is accordingly made to the drawings in
which:

Figure 1 shows a motion control system for a
device according to the present techniques;

10

Figure 2 shows one embodiment of a control node
which includes a time packet recognizer;

Figure 3 shows a motion control system which
15 includes a selector node.

DETAILED DESCRIPTION

Figure 1 shows a motion control system for a device 10 according to the present techniques. The motion control system includes a set of control nodes 30-34 each of which controls motion along a single axis of the motion control system by driving one of a set of actuators 20-24 of the device 10. Each control node 30-34 includes a corresponding synchronized clock 40-44 which holds a synchronized time value. The control nodes 30-34 coordinate the motions among the axes of the device 10 using the synchronized clocks 40-44.

The control nodes 30-34 participate in a synchronization protocol for synchronizing the time values held in the synchronized clocks 40-44. The synchronization protocol is provided so that the synchronized clocks 40-44 hold time values that agree to an accuracy suitable for coordinating the motions among the axes of the device 10.

The control nodes 30-34 apply sets of control signals 50-54 to the actuators 20-24 to perform a motion control function associated with the device 10. Each control node 30-34 associates a series of control values to be applied to the corresponding actuator 20-24 to a time value according to the motion control function. The applications of the control signals 50-54 to the actuators 20-24 by the control nodes 30-34 are triggered by synchronized time values obtained from the synchronized clocks 40-44. Each control node 30-34 monitors its corresponding synchronized clock 40-44 to determine

when to apply a control value to its corresponding actuator 20-24.

5 The device 10 represents any type of device or
any type of mechanical, electrical, chemical, or
combination system in which precise coordination of
the application of control signals to the actuators
20-24 is desirable. Examples are numerous and
include printers, plotters, and manufacturing systems
10 found in a wide variety of industries.

15 The following discussion focuses on an example
embodiment in which the device 10 is a plotter in
which the actuator 20 controls the x position of a
pen and the actuator 22 controls the y position of
the pen and the actuator 24 controls the up/down
status of the pen. It is apparent, however, that the
teachings provided with respect to the example
embodiment are readily applicable to a variety of
20 other devices and systems including very complex
systems with many more axes. In fact, one advantage
of the present techniques is that very complex
systems may be arranged into a distributed control
system with relatively simple low-cost control nodes
25 and an accurate synchronized time base that provides
coordination among many axes of motion.

30 The control nodes 30-34 in the example
embodiment may implement a motion control function
for drawing a circle in which the control nodes 30-32
use the actuators 20-22 to move the x and y positions
of the pen along the x and y axes according to the
following equations.

Eq. 1 $x = \cos \omega t$

Eq. 2 $y = \sin \omega t$

5 The x and y positions yielded by equations 1 and
2 provide the control values to be applied to the
actuators 20-22 via the control signals 50-54. The
control nodes 30-32 may compute the x and y control
values in real-time for a predetermined series of t
values using equations 1 and 2 or the x and y control
10 values may be pre-computed for the predetermined
series of t values and stored in tables in the
control nodes 30-32. The predetermined series of t
values provide trigger times for applying the
corresponding x and y control values to the actuators
15 20-22.

20 Assume for example that at time t_0 the control
node 30 is to move the pen to position x_0 along the x
axis and that the control node 32 is to move the pen
to position y_0 along the y axis in accordance with
equations 1 and 2. The control node 30 monitors the
synchronized clock 40 and when it reaches t_0 applies
the control value x_0 to the actuator 20 to move the
pen to position x_0 . Similarly, the control node 32
25 monitors the synchronized clock 42 and when it
reaches t_0 applies the control value y_0 to the
actuator 22 move the pen to position y_0 . The precise
coordination in movement along the x and y axes is
accomplished by the precise synchronization of the
30 synchronized clocks 42-42 in triggering on the t_0 time
value.

A motion control system using the control nodes
30-34 each of which provides motion control for a

single axis enables the use of simpler and cheaper
computing resources in each control node 30-34 in
comparison to prior systems in which a single control
card handles multiple axes. Each control node 30-34
5 may be sized and optimized for the characteristics of
a particular axis as well as the motion function to
be implemented in that axis. Only the exact number
of the control nodes 30-34 needed for the particular
number of axes of motion is required and extra
10 capacity is not wasted.

In one embodiment, the protocol and related
mechanisms for synchronizing the time values held in
the synchronized clocks 40-44 are those described in
15 U.S. Patent no. 5,566,180. For example, each of the
synchronized clocks 40-44 may include circuitry for
adjusting its respective locally stored time value
based upon computations of the sending and receiving
time of time data packets which are transferred over
20 a communication link 12. This protocol provides
accurate clock synchronization at a relatively low
cost with a relatively low bandwidth utilization on
the communication link 12.

25 The communication link 12 may be implemented
with one or more of a variety of communication
mechanisms. The coordination of motion control
provided by the synchronized clocks 40-44 and the
synchronization protocol enables the use of a
30 conventional network communication link for the
communication link 12 rather than a specialized
higher cost link that might otherwise be needed to
coordinate motion control among prior control cards
that control multiple axes. In one embodiment, the

communication link 12 is an Ethernet communication network. In another embodiment, the communication link 12 is a LonTalk field-level control bus which is specialized for the process control environment. In
5 other embodiments, the communication link 12 may be implemented with time division multiple access (TDMA) or token ring protocols to name only a few possibilities.

10 **Figure 2** shows one embodiment of the control node 30. The control nodes 32-34 may be implemented in a substantially similar manner. The control node 30 includes a processor 60 that implements a motion control function associated with the device 10. The
15 processor 60 associates each control value to be applied to the actuator 20 to a time value. The processor 60 may perform the associations on the fly using motion control calculations or may pre-compute the associations or the associations may be pre-
20 computed and stored in a table for subsequent reading by the processor 60 when applying control values to the actuator 20.

The control node 30 includes a physical
25 interface 64 to the communication link 12 and a time packet recognizer 62 that exchanges timing data packets and follow up packets with the nodes 32-34 according to the protocol for synchronizing the time values held in the synchronized clocks 40-44.

30 For example, the time packet recognizer 62 generates a first timing data packet and transfers it via the communication link 12 through a physical interface 64. At the time that the time packet

recognizer 62 transfers the first timing data packet to the physical interface 64 it samples the synchronized clock 40 to obtain a first time-stamp. The first time-stamp indicates the local time in the control node 30 at which the time packet recognizer 62 transferred the first timing data packet to the physical interface 64. Thereafter, the time packet recognizer 62 generates a follow up packet and transfers it via the communication link 12. The follow up packet includes the first time-stamp. The control nodes 32-34 receive and time stamp the first timing data packet generated by the control node 30. The control nodes 32 then receive the follow up packet and use the differences between the first time stamp contained in the follow up packet and the time stamps associated with the reception of the timing data packet to determine any adjustments needed for the synchronized clocks 42-44.

Similarly, the time packet recognizer 62 receives a second timing data packet generated by one of the control nodes 32-34 through the physical interface 64. The time packet recognizer 62 latches a local time value from the synchronized clock 40 when the second timing data packet is received and this latched time value provides a time stamp for reception of the second timing data packet. Thereafter, the time packet recognizer 62 receives a follow up packet from the control node 32-34 that originated the second timing data packet. The time packet recognizer 62 extracts a second time-stamp from the follow up packet. The difference between the time-stamp from the follow up packet and the time stamp for reception of the timing data packet

indicates the relative adjustment needed for the
synchronized clock 40 to maintain synchronization
among the synchronized clocks 40-44. The difference
may be computed by the processor 60.

5

The synchronized clock 40 is implemented as a
counter driven by an oscillator with sufficient
stability. The least significant few bits of the
counter may be implemented as an adder so that the
10 increment on oscillator periods may be occasionally
increased or decreased to effectively speed up or
slow down the synchronized clock 40 in accordance
with the results of the computation of difference
between time stamps for timing data packets and the
15 corresponding time stamps contained in follow up
packets.

The processor 60 obtains synchronized time
values from the synchronized clock 40 and uses the
20 synchronized time values as triggers for providing a
series of control values to a digital-to-analog (DAC)
converter 66. For example, a motion control function
with respect to the control node 30 may be defined as
shown in table 1.

25

Table 1.

Δt values	control value
0.010	2
0.020	3
0.025	4
0.030	5

5
10
15
20

The Δt values are time values relative to a t_0 time value. Each Δt value is associated with a control value to be applied to the actuator 20. For example, a control value of 2 is to be applied at time $t_0 + 0.010$ and a control value of 3 is to be applied at time $t_0 + 0.020$. The processor 60 monitors the synchronized clock 40 and when it reaches time $t_0 + 0.010$ writes a control value of 2 to the DAC 66. Similarly, the processor 60 monitors the synchronized clock 40 and writes a control value of 3 to the DAC 66 when the synchronized clock 40 reaches time $t_0 + 0.020$.

25
30

The control nodes 32-34 perform their portion of the motion control function in concert with the control node 30 using control values associated with time values. For example, the control nodes 32-24 may each have a table of control values to be applied at Δt intervals relative to a t_0 . The control nodes 32-34 monitor their respective synchronized clocks 42-44 and apply their respective control values at Δt intervals to maintain coordination with the application of control values by the control node 30.

The DAC 66 provides analog control signals to signal processing 68 which in turn drives the control signals 50 to the actuator 20. In other embodiments, the control node 30 may provide digital control values to the actuator 20 via the control signals 50 and the actuator 20 may contain the DAC 66 and signal processing 68.

The processor 60 and its related resources may be scaled according to the particular motion control function being implemented and timing requirements etc. For example, if the processor 60 must calculate control values on the fly using relatively complex motion equations and/or must calculate control values during very brief time intervals then a relatively powerful processor may be needed along with sufficient memory resources. On the other hand, if the equations for motion control are relatively simple or pre-computed or if the time intervals for calculating control values is relatively long, i.e. for relatively slow motion, then simpler and lower cost processor and memory resources may be used thereby lowering the cost of the control node 30.

Figure 3 shows a motion control system for the device 10 which includes a selector node 14. The control nodes 30-34 include corresponding sets of tables $1-n_1$, $1-n_2$, and $1-n_3$, respectively. Each of the tables $1-n_1$, $1-n_2$, and $1-n_3$ holds a set of control values to be applied to the corresponding actuators 20-24. Each control value in the tables $1-n_1$, $1-n_2$, and $1-n_3$ is associated with a time value which is to be used to trigger the application of the control value as previously described.

The control values in any one or more of the tables $1-n_1$, $1-n_2$, and $1-n_3$ may be pre-computed by the selector node 14 and distributed to the control nodes 30-34 via the communication link 12. Alternatively, 5 the control values in any one or more of the tables $1-n_1$, $1-n_2$, and $1-n_3$ may be pre-computed by the processor resources in the corresponding control node 30-34. The selector node 14 may distribute equations to the control nodes 30-34 via the communication link 10 12 that enable the control nodes 30-34 to pre-compute the control values for the corresponding tables $1-n_1$, $1-n_2$, and $1-n_3$.

The selector node 14 may determine a motion 15 control function to be applied to the device 10 by transferring messages to the control nodes 30-34 via the communication link 12 that specify which of the tables $1-n_1$, $1-n_2$, and $1-n_3$ is to be used and that specify a starting time t_0 for the motion control 20 function. For example, the selector node 14 may transfer a message to the control node 30 which specifies that table 1 in the control node 30 is to be applied starting at 2 PM and may transfer a message to the control node 32 which specifies that 25 table 3 in the control node 32 is to be applied starting at 2 PM. In response, the control nodes 30-32 monitor their respective synchronized clocks 40-42 and begin applying the specified control values when their respective synchronized clocks 40-42 reach 2 30 PM.

Alternatively, the selector node 14 may determine a motion control function to be applied to the device 10 by transferring messages to the control

nodes 30-34 via the communication link 12 that contain equations for generating a table of control values to be used and that specify a starting time t_0 for the motion control function. For example, the selector node 14 may transfer a message to the control node 30 which specifies that x control values derived from $x = \cos \omega t$ are to be applied starting at 2 PM and may transfer a message to the control node 32 which specifies that y control values derived from $y = \sin \omega t$ are to be applied starting at 2 PM. In response, the control nodes 30-32 pre-compute the control values using these equations and then monitor their respective synchronized clocks 40-42 and begin applying the pre-computed control values when their respective synchronized clocks 40-42 reach 2 PM.

In another alternative, the selector node 14 may determine a motion control function to be applied to the device 10 by transferring messages to the control nodes 30-34 via the communication link 12 that contain pre-computed control values and associated time values and that specify a starting time t_0 for the motion control function.

The foregoing detailed description of the present invention is provided for the purposes of illustration and is not intended to be exhaustive or to limit the invention to the precise embodiment disclosed. Accordingly, the scope of the present invention is defined by the appended claims.

CLAIMS

What is claimed is:

- 5 1. A motion control system having a set of control
nodes each corresponding to an axis of the motion
control system, each control node having a
synchronized clock and each applying a series of
control values to an actuator for the corresponding
10 axis such that the control nodes coordinate
application of the control values to the actuators
using the synchronized clocks.
- 15 2. The motion control system of claim 1, wherein
each control node participates in a protocol for
synchronizing the synchronized clocks via a
communication link.
- 20 3. The motion control system of claim 1, wherein
each control node associates each control value of
the corresponding series of control values to be
applied to the corresponding actuator to a time value
according to a motion control function for the
corresponding axis.
- 25 4. The motion control system of claim 3, wherein
each control node triggers an application of each
control value to the corresponding actuator when the
corresponding time value equals a time provided by
30 the corresponding synchronized clock.
5. The motion control system of claim 1, wherein
each control node includes a set of processing

resources which are scaled according to a motion control function for the corresponding axis.

5 6. A control node for a motion control system, the control node having a synchronized clock and having means for applying a series of control values to an actuator for a corresponding axis of the motion control system such that the application of the control values to the actuator is coordinated using
10 the synchronized clock.

15 7. The control node of claim 6, further comprising means for participating in a protocol for synchronizing the synchronized clock via a communication link.

20 8. The control node of claim 6, further comprising means for associating each control value to be applied to the actuator to a time value according to a motion control function for the corresponding axis.

25 9. The control node of claim 8, further comprising means for triggering an application of each control value to the actuator when the corresponding time value equals a time provided by the synchronized clock.

30 10. The control node of claim 6, further comprising a set of processing resources which are scaled according to a motion control function for the corresponding axis.

11. A motion control system, comprising:

a set of control nodes each corresponding to an axis of the motion control system, each control node having a synchronized clock and each applying a corresponding series of control values to an actuator
5 for the corresponding axis such that the control nodes coordinate application of the control values to the actuators using the synchronized clocks;

selector node that determines a motion control function to be applied to the axes by transferring a
10 message to each control node that specifies the series of control values to be applied by each control node.

12. The motion control system of claim 11, wherein
15 each message further specifies a starting time for the motion control function.

13. The motion control system of claim 11, wherein
20 each message specifies one of a set of tables in the corresponding control node that holds a set of pre-computed control values to be applied for the motion control function.

14. The motion control system of claim 13, wherein
25 the pre-computed control values in the tables are generated by the control node.

15. The motion control system of claim 13, wherein
30 the pre-computed control values in the tables are generated by the selector node and distributed to the control nodes.

16. The motion control system of claim 11, wherein each message specifies one or more equations to be

used to generate the corresponding series of control values to be applied for the motion control function.

- 5 17. The motion control system of claim 11, wherein each message contains the corresponding series of control values to be applied for the motion control function.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
222

ABSTRACT

A motion control system having a set of control nodes each of which controls motion along a single axis of the motion control system and which coordinate their collective motions using time synchronization technology. Each control node corresponds to an axis of the motion control system and each control node includes a synchronized clock and participates in a protocol for synchronizing the synchronized clocks. The application of a series of control values to each axis in the motion control system is coordinated using the synchronized clocks.

Diagram illustrating a multi-channel device 10. The device consists of a common bus 12 and three parallel channels. Each channel includes a synchronized clock (30, 32, 34) and an actuator (20, 22, 24). The channels are connected to the bus via lines 50, 52, and 54.


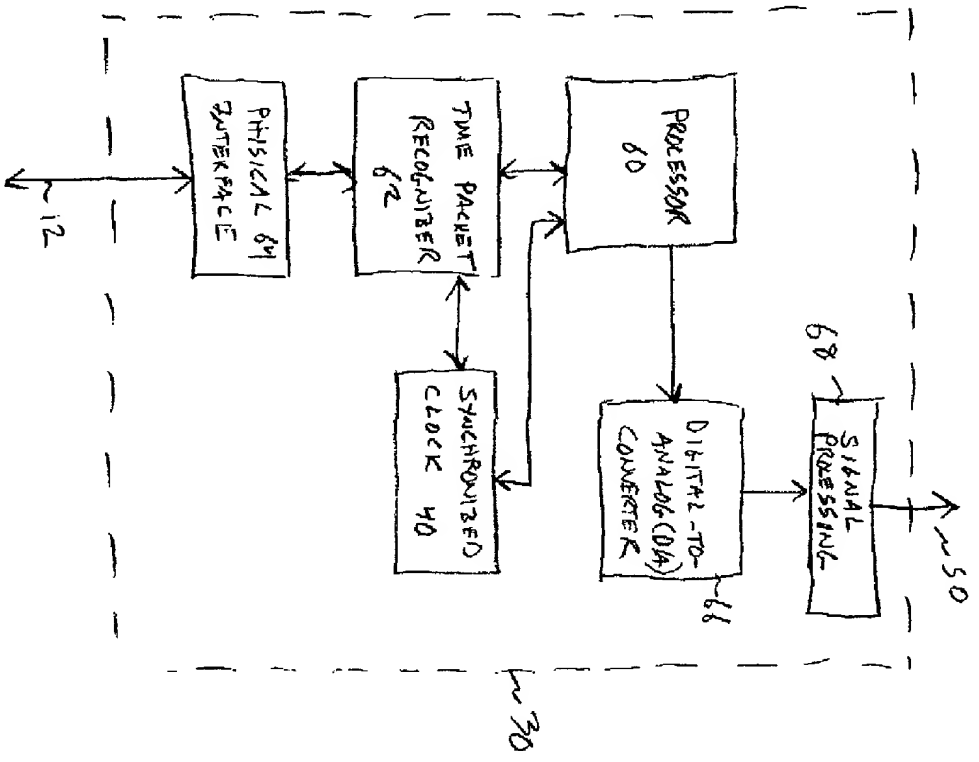


FIG 2

HP 10980749

FIG 3

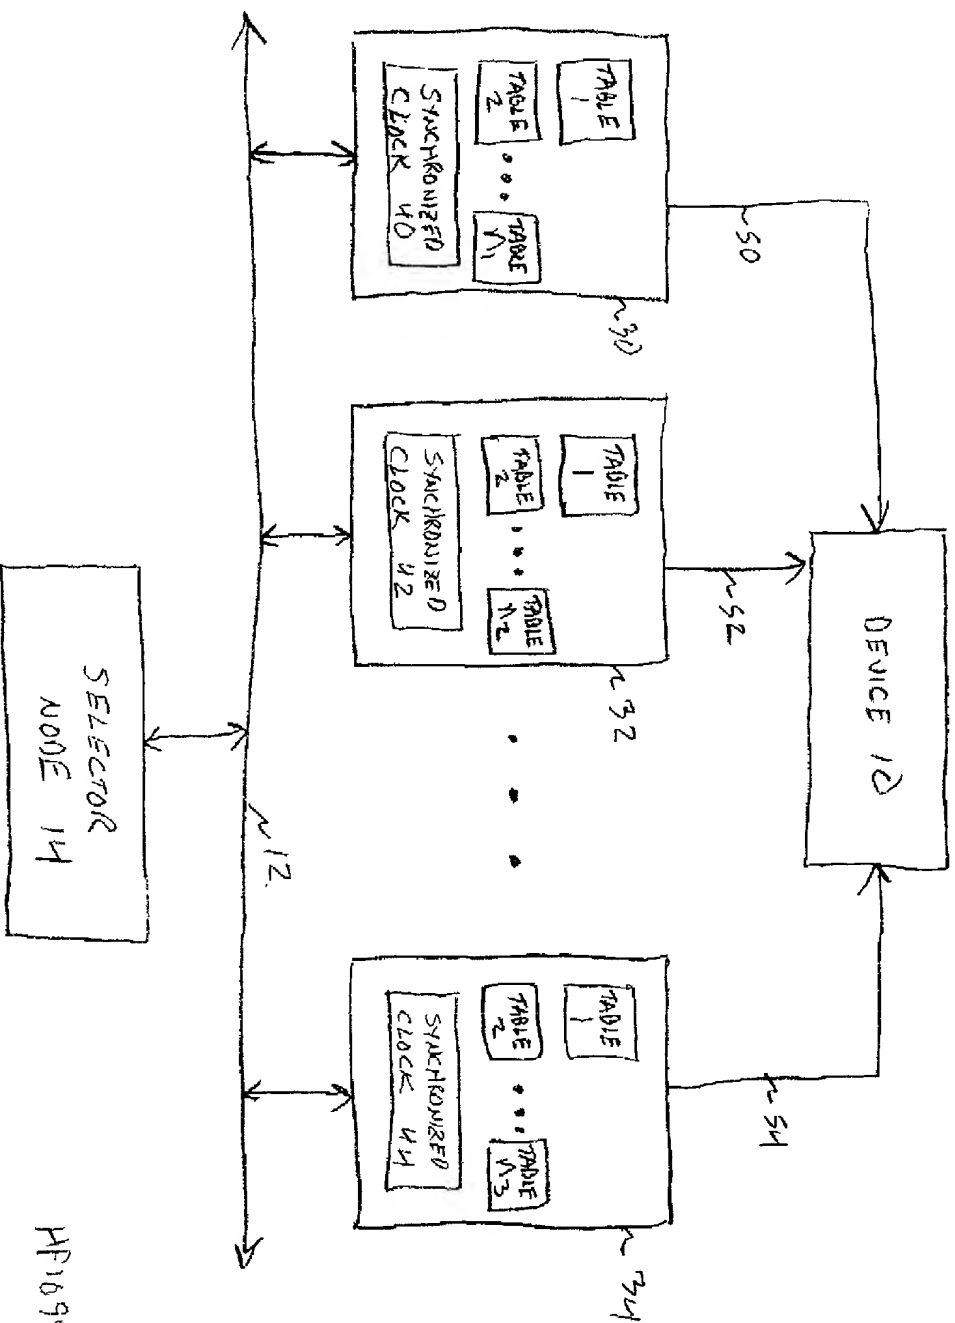

HF16980749

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**

ATTORNEY DOCKET NO. 10980748

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

MOTION CONTROL USING TIME SYNCHRONIZATION

the specification of which is attached hereto unless the following box is checked:

() was filed on _____ as US Application Serial No. or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119
			YES: _____ NO: _____
			YES: _____ NO: _____

Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE

U. S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (patented/pending/abandoned)

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) listed below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

 Marc P. Schuyler, Reg. No. 35,675 Herbert R. Schulze, Reg. No. 30,682 Marc R. Mayer, Reg. No. 36,211
 Robert T. Martin, Reg. No. 32,426
Send Correspondence to:

IP Administration

Legal Department, 20BN

HEWLETT-PACKARD COMPANY

P.O. Box 10301

Palo Alto, California 94303-0890

Direct Telephone Calls To:

Paul H. Horstmann

415-602-1721

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: John C. Eidson

Citizenship: U.S.

Residence: 3294 Ross Road Palo Alto, California 94303

Post Office Address: 3294 Ross Road Palo Alto, California 94303

Inventor's Signature: *John C. Eidson*

Date: Nov. 23, 1998